
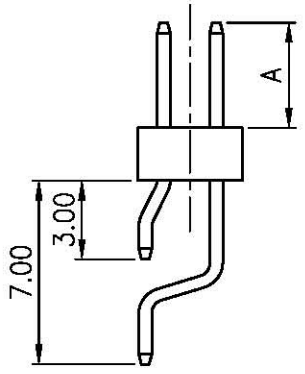
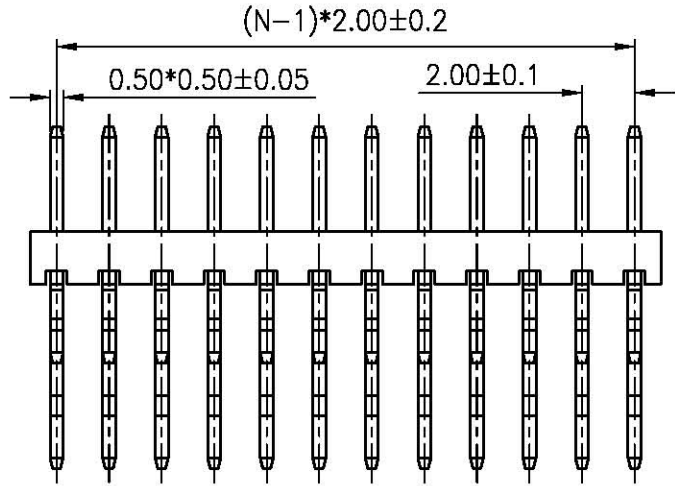



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/08/05'		

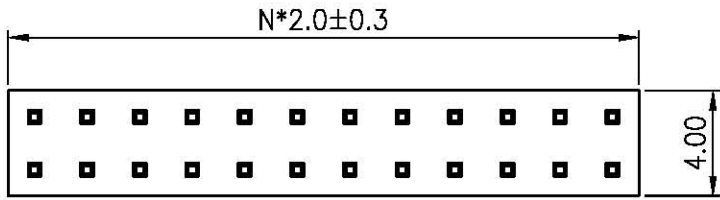

NOTES:


- MATERIAL & FINISHES
 - INSULATOR: PA-46(UL 94V-0).
 - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING: 1.5 Amp.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - DIELECTRIC WITHSTANDING: 600VAC.
 - CONTACT RESISTANCE: 30mΩ Max.
 - OPERATING TEMPERATURE: -20°C TO +80°C.

- PART NUMBER: DS1025-07
- PRODUCT NUMBER CODE:

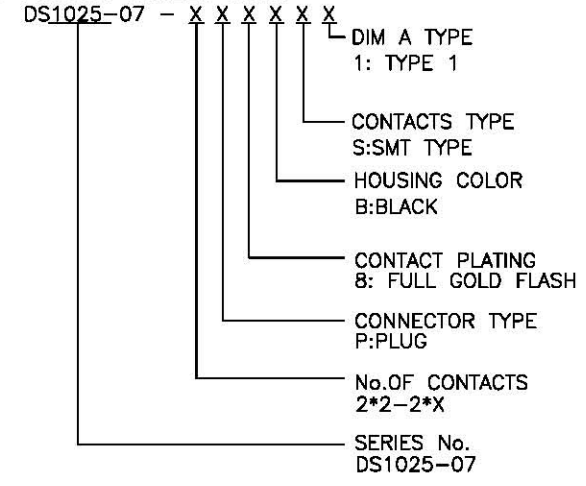

N: NUMBER OF CONTACTS/2

TYPE	A
1	4.00
2	
3	
4	
5	

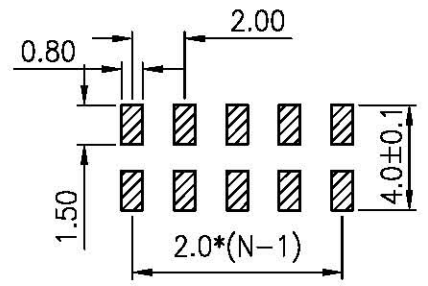

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		DUAL ROW RIGHT ANGLE S.M.T
.X	±0.38	.X	±3°	mm	
.XX	±0.25	.XX	±2°	A4	SERIES DS1025-07 SERIES
DRAWING TYPE	CUSTOMER				
SCALE	1:1	SHEET	1 OF 1		
DRAWING NO.	C-DS1025-07-XXXXXX				