

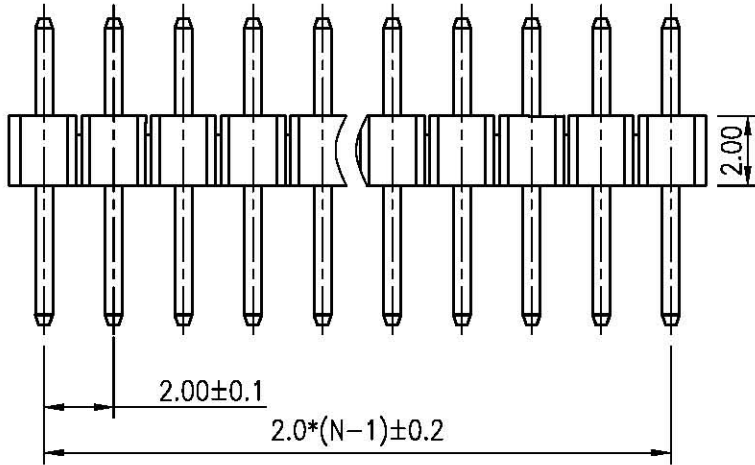


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/27/05'	~	LJC 04/27/05'
B	增加尺寸规格表格	YCH 07/04/07'	~	

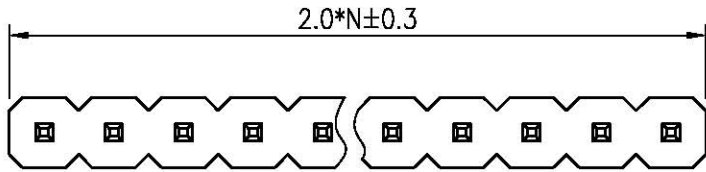

N:NUMBER OF CONTACTS



RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

NOTES:

1. MATERIAL&FINISHES

- 1.1 INSULATOR:THERMOPLASTIC(UL 94V-0).
- 1.2 CONTACT MATERIAL: COPPER ALLOY.

2. SPECIFICATION

- 2.1 CURRENT RATING:1.5 Amp.
- 2.2 INSULATION RESISTANCE:1000MΩ Min.
- 2.3 DIELECTRIC WITHSTANDING:600VAC.
- 2.4 CONTACT RESISTANCE:20mΩ Max.
- 2.5 OPERATING TEMPERATURE:-20°C TO +80°C.

3. PART NUMBER: DS1025-01

4. PRODUCT NUMBER CODE:

DS1025-01 - X X X X X X

- DIM.A B TYPE
- 1: TYPE 1
- 2: TYPE 2
- CONTACTS TYPE
- V:VERTICAL TYPE
- HOUSING COLOR
- B:BLACK
- CONTACT PLATING
- 8:FULL GOLD FLASH
- 6:TIN
- CONNECTOR TYPE
- P:PLUG
- No.OF CONTACTS
- 1\*2-1\*X
- SERIES No.
- DS1025-01

TYPE	DIM A	DIM B
1	4.00	2.80
2	6.00	3.00
3	2.80	10.20
4	2.80	15.20
5	7.00	3.00
6		
7		
8		

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5'
.X	±0.38	.X	±3'
.XX	±0.25	.XX	±2'

PROJECTION	TITLE
UNITS	SINGLE ROW STRAIGHT
SHEET SIZE	SERIES DS1025-01 SERIES

2	CONTACT		COPPER ALLOY	GOLD PLATED	DRAWING TYPE	CUSTOMER		
1	HOUSING		THERMOPLASTIC	UL 94 V-0	SCALE	1:1	SHEET	1 OF 1
ITEM	PART NAME	PART NO.	MATERILAS	FINISHED	DRAWING NO.	C-DS1025-01-XXXXXX		