

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 08/03/09'	~	

N=NUMBER OF CONTACTS

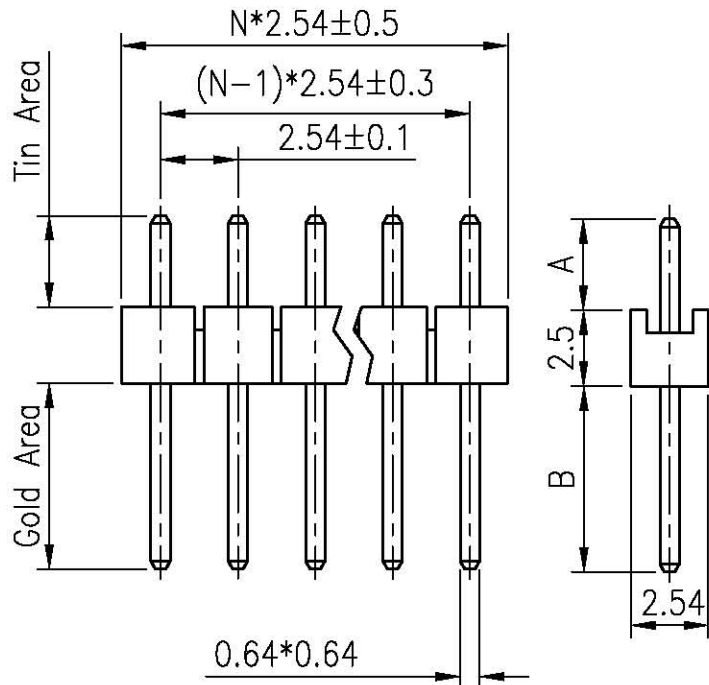


TABLE A:

TYPE	Dimension	
	A	B
1	3.00	6.10
2	3.30	11.90
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE: 0°C~+85°C.
 - STORAGE TEMPERATURE: -20°C~+70°C.

3. PRODUCT NUMBER CODE:

DS1021-03- X X X X

TABLE A & DIM. TYPE

1: TYPE 1

2: TYPE 2

⋮

CONTACT PLATING

0: SELECTIVE GOLD FLASH

1: SELECTIVE 10u" GOLD


3: SELECTIVE 30u' GOLD

MOUNTING TYPE

V: V/T TYPE

No. OF CONTACTS

1*1~1*40

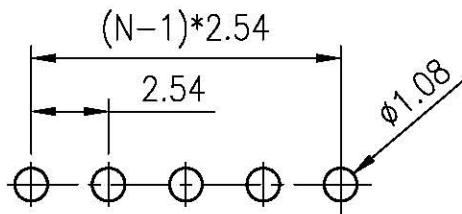

RECOMMEND PCB LAYOUT
(TOLERANCE ±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PIN HEADER PITCH 2.54mm V/T
X	±0.60	X	±5'	UNITS	mm		SELECTIVE GOLD TYPE
.X	±0.38	.X	±3'	SHEET SIZE	A4	SERIES	DS1021-03 SERIES
.XX	±0.25	.XX	±2'				
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET	1 OF 1			
DRAWING NO.		C-DS1021-03-1*XXX					