
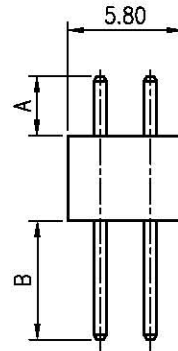


| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|-------------|---------------|---------|----------|
| A | NEW RELEASE | LJC 01/15/09' | | |
| | | | | |
| | | | | |

SINGLE ROW
 N:NUMBER OF CONTACTS
 A/B:CUSTOMER LENGTH AVAILABLE

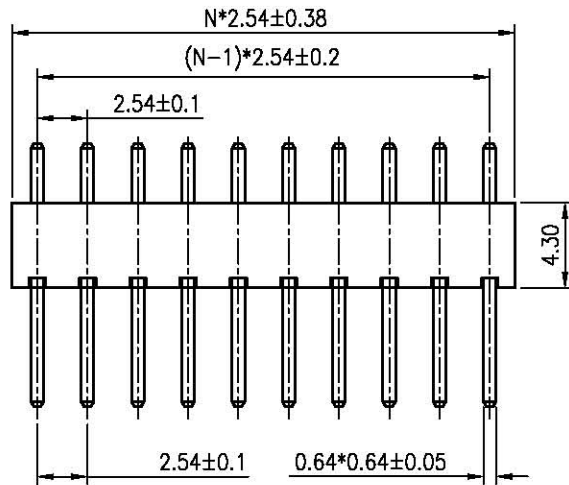

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE RANGE: -45°C~+110°C.

TABLE A:

| TYPE | Dimension | |
|------|-----------|------|
| | A | B |
| 1 | 3.00 | 6.00 |
| 2 | | |
| 3 | | |
| 4 | | |
| 5 | | |
| 6 | | |
| 7 | | |
| 8 | | |
| 9 | | |
| 10 | | |
| 11 | | |
| 12 | | |
| 13 | | |
| 14 | | |
| 15 | | |
| 16 | | |
| 17 | | |

3. PRODUCT NUMBER CODE:

DS1021-01- X X X X

DIM A & B TYPE
 1: TYPE 1

 CONTACT PLATING
 8: FULL GOLD FLASH
 6: TIN
 MOUNTING TYPE
 V: V/T TYPE
 No. OF CONTACTS
 2*2~2*40
 1*1~1*40

| | | | | | | | |
|-------------------|-------|-------------------|-------|------------|--------|--------|-------------------------|
| GENERAL TOLERANCE | | ANGLE TOLERANCE | | PROJECTION | | TITLE | PIN HEADER PITCH 2.54mm |
| X. | ±0.60 | X. | ±5' | UNITS | mm | | V/T TYPE H=4.3mm |
| .X | ±0.38 | .X | ±3' | SHEET SIZE | A4 | SERIES | DS1021-01 SERIES |
| .XX | ±0.25 | .XX | ±2' | | | | |
| DRAWING TYPE | | CUSTOMER | | | | | |
| SCALE | | 1:1 | SHEET | | 1 OF 1 | | |
| DRAWING NO. | | C-DS1021-01-XXXXX | | | | | |