


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 12/20/06'		

NOTES:

1. MATERIAL
 - 1.1 INSULATOR:PBT(UL 94V-0).
 - 1.2 CONTACT MATERIAL:COPPER ALLOY.
2. SPECIFICATION
 - 2.1 CURRENT RATING:1.5 Amp.
 - 2.2 INSULATION RESISTANCE:1000MΩ Min.
 - 2.3 DIELECTRIC WITHSTANDING:600VAC.
 - 2.4 CONTACT RESISTANCE:50mΩ Max.
 - 2.5 OPERATING TEMPERATURE:-40°C TO+105°C.

3. PRODUCT NUMBER CODE:

DS1029-09 - X X X X X

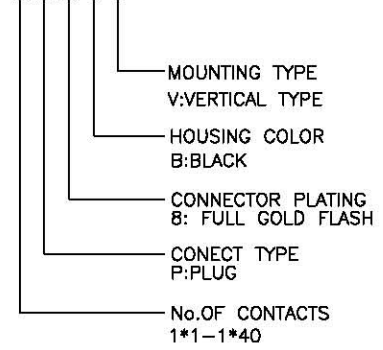

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5'
.X	±0.38	.X	±3'
.XX	±0.25	.XX	±2'

PROJECTION	TITLE	BOARD SPACERS PIN HEADER PITCH 2.54mm	
UNITS	mm	SHEET SIZE	A4
SHEET SIZE	A4	SERIES	DS1029-09 SERIES

ITEM	PART NAME	PART NO.	MATERIALS	FINISHED	DRAWING NO.	CUSTOMER
2	CONTACT		COPPER ALLOY	GOLD FLASH	DRAWING TYPE	CUSTOMER
1	HOUSING		THERMOPLASTIC	UL 94 V-0	SCALE	1:1 SHEET 1 OF 1
					DRAWING NO.	C-DS1029-09-XXXXX