

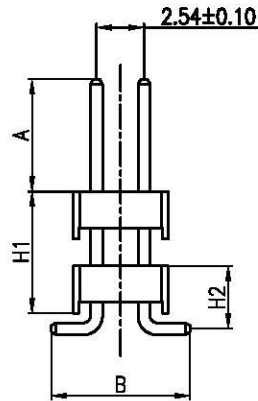
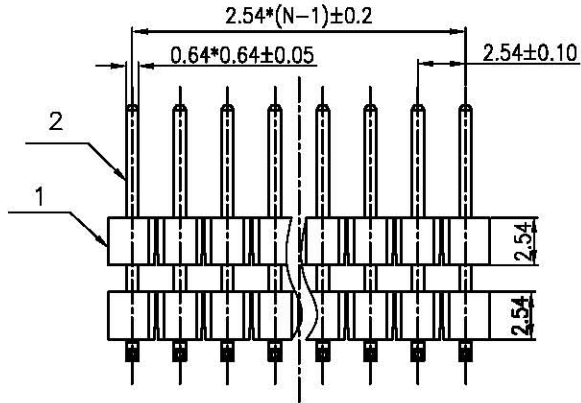


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 09/12/06'		

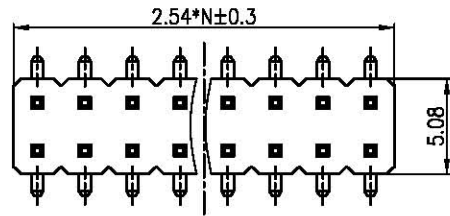

N:NUMBER OF CONTACTS/2

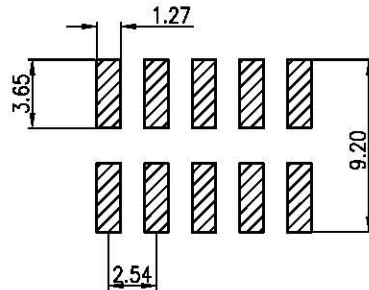

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

NOTES:

- MATERIAL
 - INSULATOR:PA-46(UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.5 Amp.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:600VAC.
 - CONTACT RESISTANCE:50mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO+105°C.
- PART NUMBER: DS1029-06
- PRODUCT NUMBER CODE:

DS1029-06 - X X X X X X

- DIM.A B H1 H2 TYPE
- 1: TYPE 1
- 2: TYPE 2
- 3: TYPE 3
- MOUNTING TYPE
- S: SMT TYPE
- HOUSING COLOR
- B:BLACK
- CONNECTOR PLATING
- B: FULL GOLD FLASH
- CONECT TYPE
- P:PLUG
- No.OF CONTACTS
- 2*1-2*40
- SERIES No.
- DS1029-06

TYPE	DIM A	DIM B	DIM H1	DIM H2	PIN LENGTH
1	6.00	7.40	6.50	3.36	15.30
2	6.00	7.40	15.00	3.36	23.80
3	5.80	7.40	6.50	3.81	15.60
4					
5					
6					
7					
8					
9					
10					
11					

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.54mm PITCH PIN HEADER
X	±0.60	X	±5'	UNITS	mm	DUAL ROW S.M.T	
.X	±0.38	.X	±3'	SHEET SIZE	A4	SERIES	DS1029-06 SERIES
.XX	±0.25	.XX	±2'				

2	CONTACT		COPPER ALLOY	GOLD PLATED	DRAWING TYPE	CUSTOMER		
1	HOUSING		THERMOPLASTIC	UL 94 V-0	SCALE	1:1	SHEET	1 OF 1
ITEM	PART NAME	PART NO.	MATERILAS	FINISHED	DRAWING NO.	C-DS1029-06-XXXXXX		