



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 11/29/05'	~	LJC 11/29/05'
B	ADD DIM.	LJH 04/20/06'	~	LJC 04/20/06'
C	ADD DIM.	LL 11/23/06'	~	LJC 11/23/06'
D	ADD DIM.	YCH 04/23/08'	~	LJC 04/23/08'
E	增加V1与V2选择	YCH 03/25/09'	~	

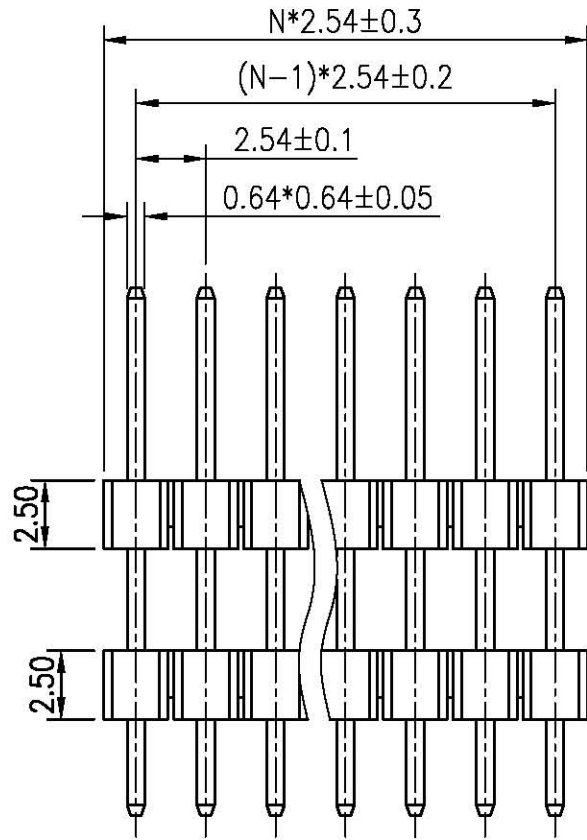


N:NUMBER OF CONTACTS

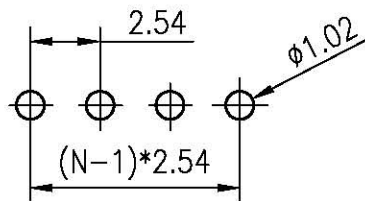


RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

V1 TYPE

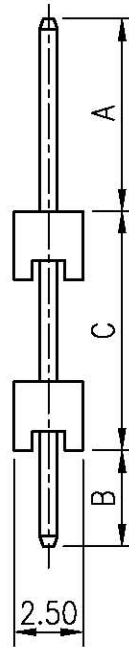

V2 TYPE

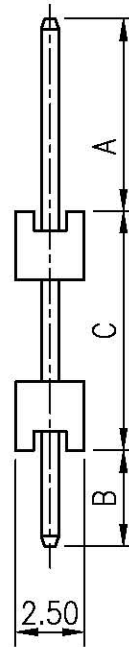

NOTES:

- MATERIAL
 - INSULATOR:PA-46.
 - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.5 Amp.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:600VAC.
 - CONTACT RESISTANCE:50mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO+105°C.
- PART NUMBER: DS1029-01
- PRODUCT NUMBER CODE:
DS1029-01 - X X X X X X X X
 - DIM.A B C TYPE
 - 1: TYPE 1
 - 2: TYPE 2
 - 42: TYPE 42
 - BEND TYPE
 - A: V1 TYPE
 - B: V2 TYPE
 - MOUNTING TYPE
 - V:VERTICAL TYPE
 - HOUSING COLOR
 - B:BLACK
 - CONNECTOR PLATING
 - 8: FULL GOLD FLASH
 - CONNECT TYPE
 - P:PLUG
 - No.OF CONTACTS
 - 1*1-1*40

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	BOARD SPACERS PIN HEADER
X.	±0.60	X.	±5'	UNITS	mm		PITCH 2.54mm
.X	±0.38	.X	±3'	SHEET SIZE	A4	SERIES	DS1029-01 SERIES
.XX	±0.25	.XX	±2'				
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET	1 OF 2			
DRAWING NO.		C-DS1029-01-XXXXXXX					