


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 26/06/05		

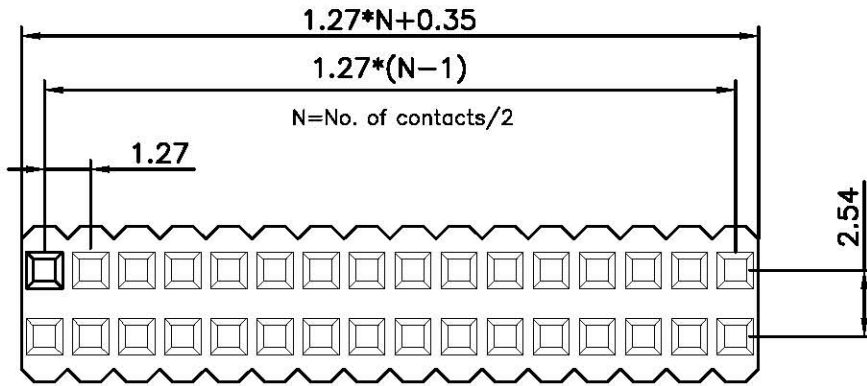

NOTES:

1. SPECIFICATIONS

- . Current Rating: 1A
- . Insulation Resistance: 500MΩ Min
- . Dielectric Withstanding: 300V AC
- . Contact Resistance: 30mΩ Max
- . Operating Temperature: -20°C to +70°C

2. MATERIALS



- . Contact Material: Copper alloy
- . Insulator: PBT(UL94V-0)

3. PART NUMBER: DS1065-09

4. PRODUCT NUMBER CODE:

DS1065-09 - X X X X X

- MOUNTING TYPE
V: VERTICAL TYPE
- HOUSING COLOR
B: BLACK
- CONTACT PLATING
8: FULL GOLD FLASH
- CONNECTOR TYPE
S: SOCKET
- No. OF CONTACTS
2*1-2*40

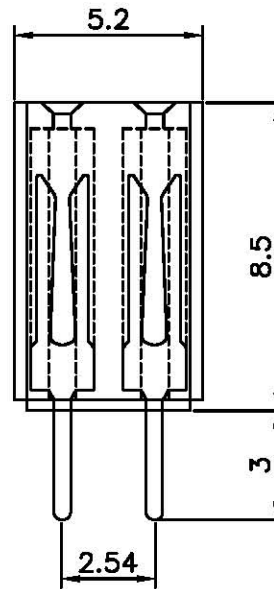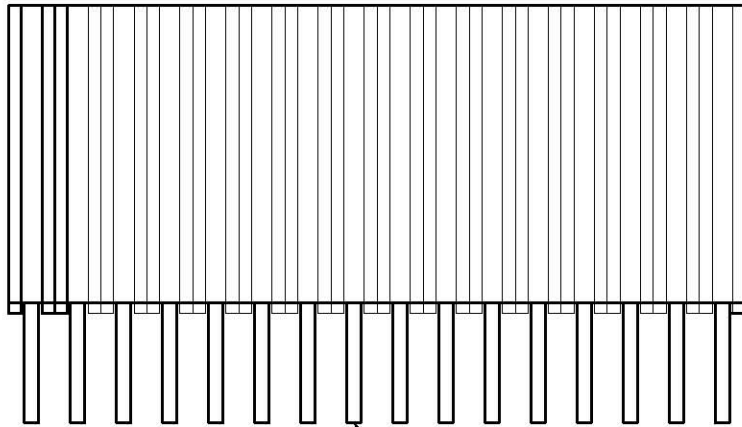

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°	mm	FEMALE HEADER PITCH 1.27mm TYPE
.X	±0.38	.X	±3°		DUAL ROW 8.5mm HEIGHT
.XX	±0.25	.XX	±2°		
DRAWING TYPE		CUSTOMER		SHEET SIZE	SERIES
SCALE		1:1	SHEET	A4	DS1065-09
DRAWING NO.		C-DS1065-09-XXXXX			