


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 25/06/05		

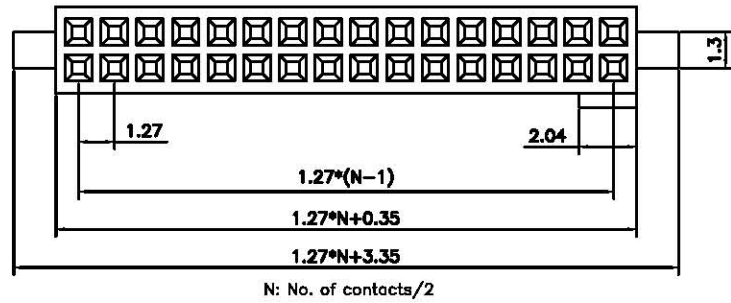

NOTES:

1. SPECIFICATIONS

- . Current Rating: 1A
- . Insulation Resistance: 500MΩ Min
- . Dielectric Withstanding: 300V AC
- . Contact Resistance: 30mΩ Max
- . Operating Temperature: -20°C to +70°C

2. MATERIALS




- . Contact Material: Copper alloy
- . Insulator: PBT(UL94V-0)

3. PART NUMBER: DS1065-04

4. PRODUCT NUMBER CODE:

DS1065-04 - X X X X X

- MOUNTING TYPE
V:V/T TYPE
- HOUSING COLOR
B:BLACK
- CONTACT PLATING
8: FULL GOLD FLASH
- CONNECTOR TYPE
S:SOCKET
- No.OF CONTACTS
2*1-2*40

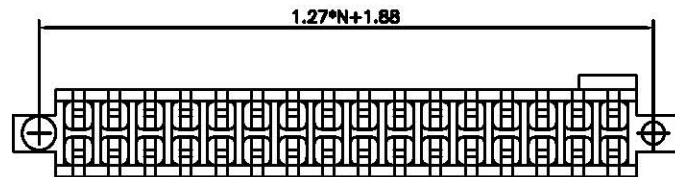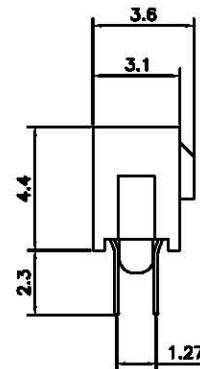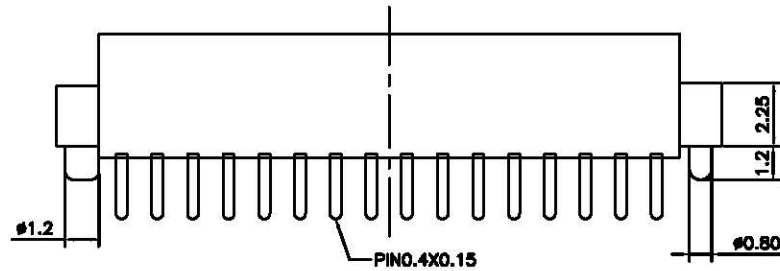

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	WITH POLARIZATION AND LOCAL PEG V/T TYPE	
X.	±0.60	X.	±5°	mm			
.X	±0.38	.X	±3°	A4	SERIES	DS1065-04	
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET	1 OF 1			
DRAWING NO.		C-DS1065-04-XXXXX					