

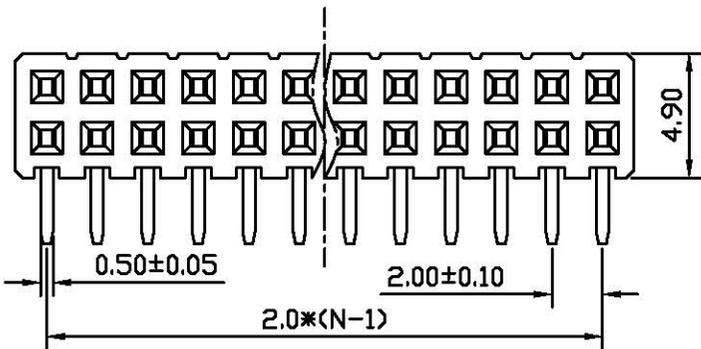
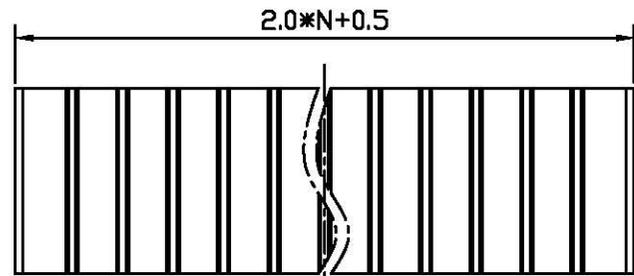


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 06/22/05'		

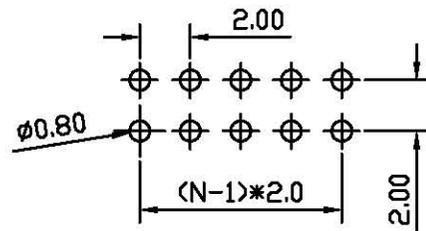

N: HALF OF PIN POSITIONS



RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
  - OPERATING TEMPERATURE: 0°C~+85°C.
  - STORAGE TEMPERATURE: -20°C~+70°C.
- PART NUMBER: DS1026-13
- PRODUCT NUMBER CODE:  
DS1026-13 - X X X X X

CONTACTS TYPE  
R:RIGHT ANGLE

HOUSING COLOR  
B:BLACK

CONTACT PLATING  
8:FULL GOLD FLASH

CONNECTOR TYPE  
S:SOCKET

No.OF CONTACTS  
2\*1-2\*X

SERIES No.  
DS1026-13

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	SIDE ENTRY RIGHT ANGLE	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1026-13 SERIES	
.XX	±0.25	.XX	±2°					
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET		1 OF 1			
DRAWING NO.		C-DS1026-13-XXXXX						