



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 06/04/07		



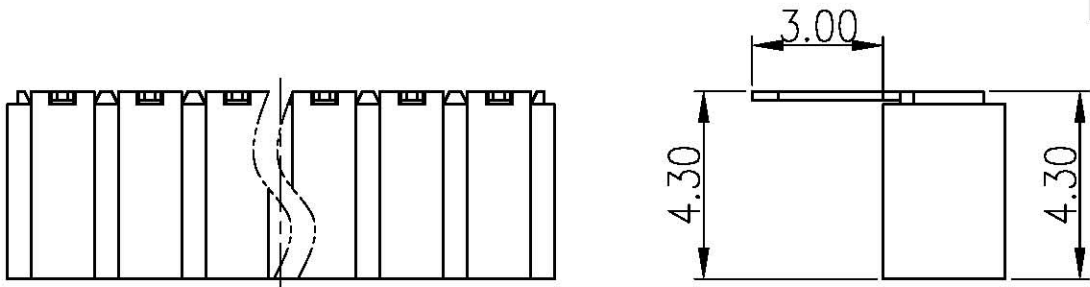


NOTES:

1. ELECTRICAL CHARACTERISTICS:
 - 1.1 CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - 1.3 INSULATION RESISTANCE: 1000MΩ Min.
2. ENVIRONMENT CHARACTERISTICS:
 - 2.1 OPERATING TEMPERATURE: 0°C~+85°C.
 - 2.2 STORAGE TEMPERATURE: -20°C~+70°C.

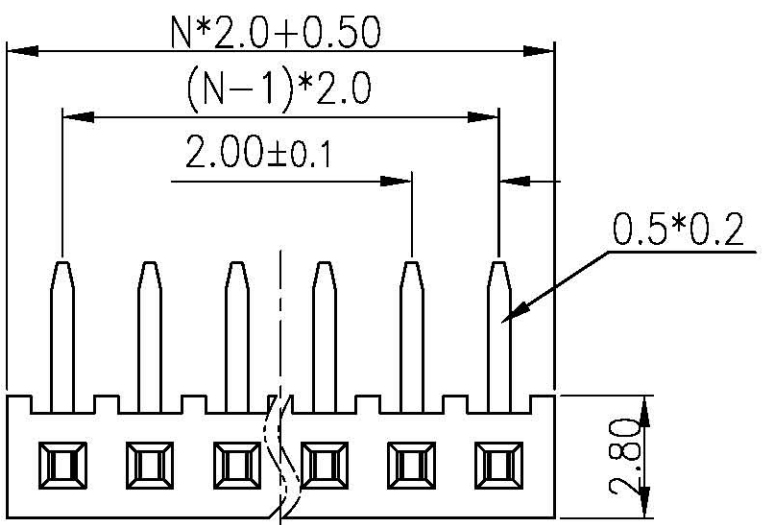

3. PRODUCT NUMBER CODE:

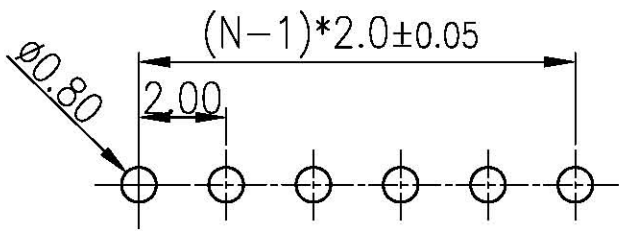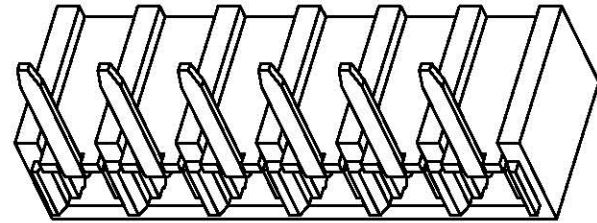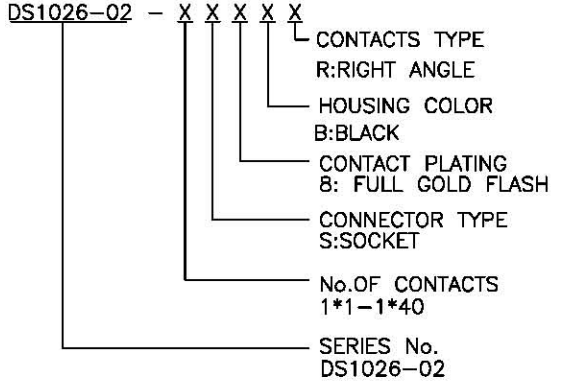

Recommend PCB layout

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	FEMALE HEADER PITCH 2.00mmTYPE	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1026-02 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET	1 OF 1			
DRAWING NO.		C-DS1026-02-XXXXX-A					