

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ych 01/24/08'		





NOTES:

- MATERIAL
 - INSULATOR MATERIAL:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
 - TEMPERATURE:-45° to +110°C.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V AC.
 - INSULATION RESISTANCE:1000MΩ min.
 - CONTACT RESISTANCE:20mΩ max.
 - CURRENT RATING:3A.

4. PRODUCT NUMBER CODE:

DS1024-02 - X X X

CONTACT PLATING
 8: Full gold flash
 0: Selective gold flash
 MOUNTING TYPE
 R: R/A type
 No.of Contacts
 1*1 - 1*40

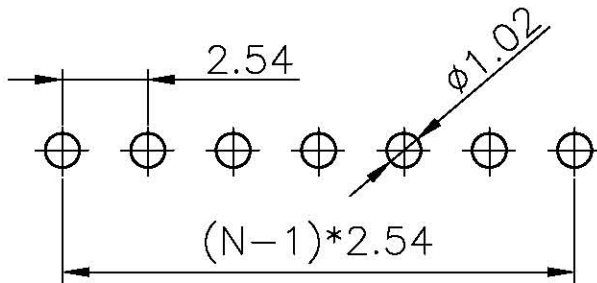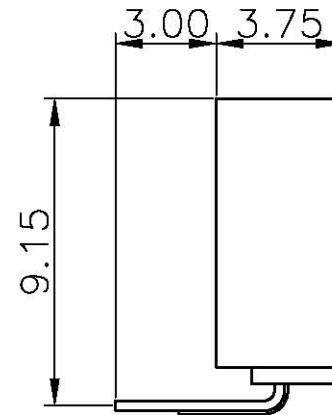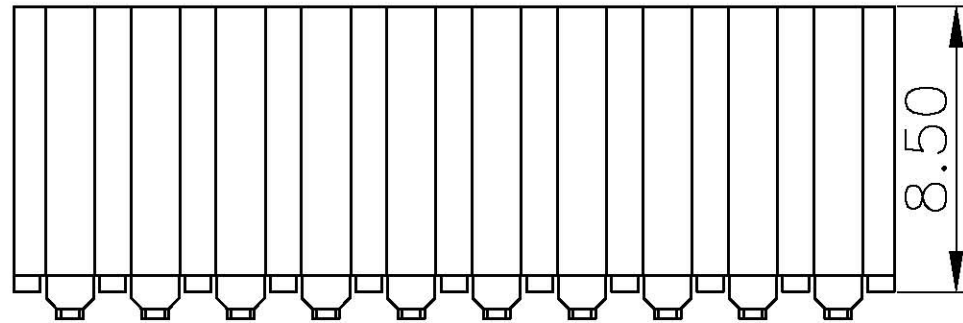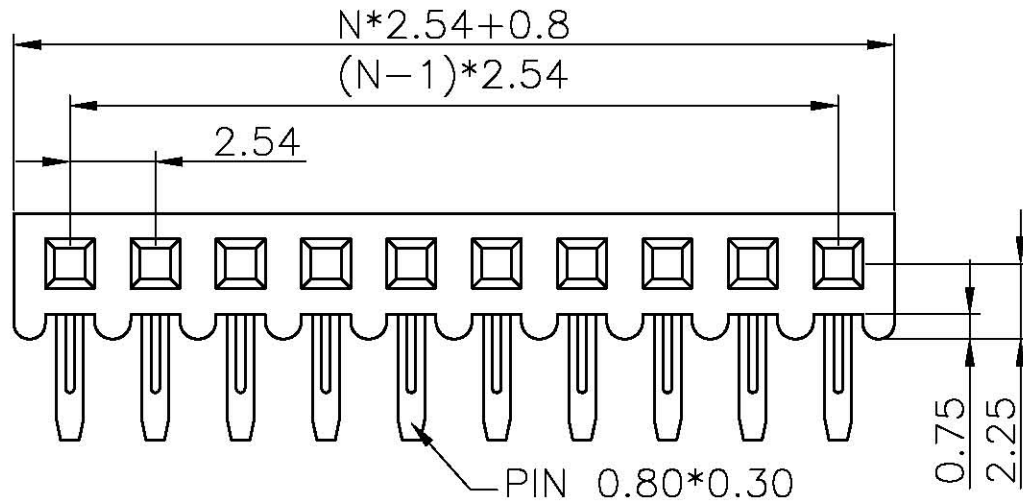

RECOMMEND PCB LAYOUT
 (TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	FEMALE HEADER PITCH		
X.	±0.60	X.	±5°	UNITS	mm	2.54mm R/A TYPE			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1024-02 SERIES		
.XX	±0.25	.XX	±2°						
DRAWING TYPE		CUSTOMER							
SCALE		1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1024-02-XXX							