

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 08/16/07'		

NOTES:



1. SPECIFICATION:

- 1.1 CONTACT RESISTANCE: 30mΩ MAX.
- 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 250V AC(rms) FOR 1 MINUTE.
- 1.3 INSULATION RESISTANCE: 500MΩ Min.
- 1.4 OPERATING TEMPERATURE: -20°C~+80°C.


2. PRODUCT NUMBER CODE:

DS1027-02 - X X X X X



- PROFILE HEIGHT(DIM A):
0:6.0mm
- CONTACT PLATING:
F1: FULL GOLD FLASH
N: NICKEL
2: GOLD+NICKEL
- HOUSING COLOR:
B: BLACK U:BLUE Y:YELLOW
W: WHITE E:GREEN R:RED
- HOUSING TYPE:
A:OPEN
B:CLOSE
- No.OF PORTS:
3: 3ports 8: 8ports
4: 4ports 9: 9ports
5: 5ports 10: 10ports
6: 6ports 7: 7ports
- SERIES No:
DS1027-02

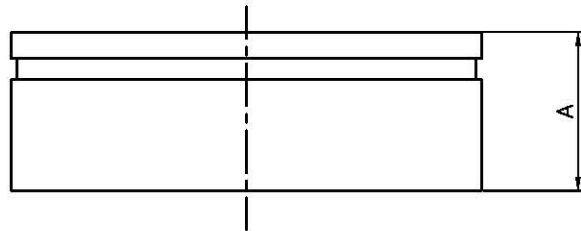

OPEN TYPE



CLOSE TYPE

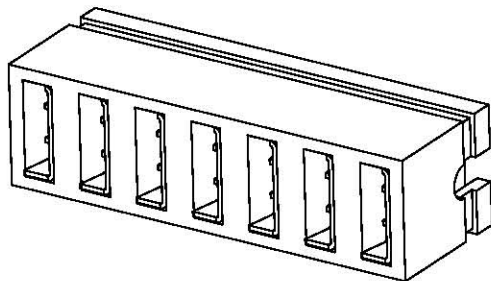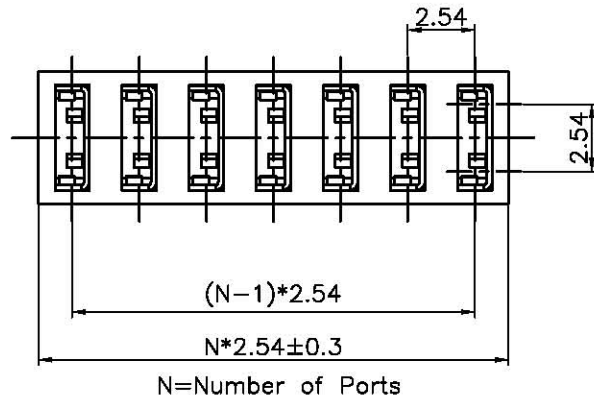

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	
X.	±0.60	X.	±5°		2.54mm pitch MINI JUMPER Stack type 3-10 ports	
.X	±0.38	.X	±3°	mm		
.XX	±0.25	.XX	±2°	A4		
DRAWING TYPE				CUSTOMER	SHEET	DS1027-02 SERIES
SCALE				1:1	SHEET	1 OF 1
DRAWING NO.				C-DS1027-02-XXXXX		