


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 12/04/06'		

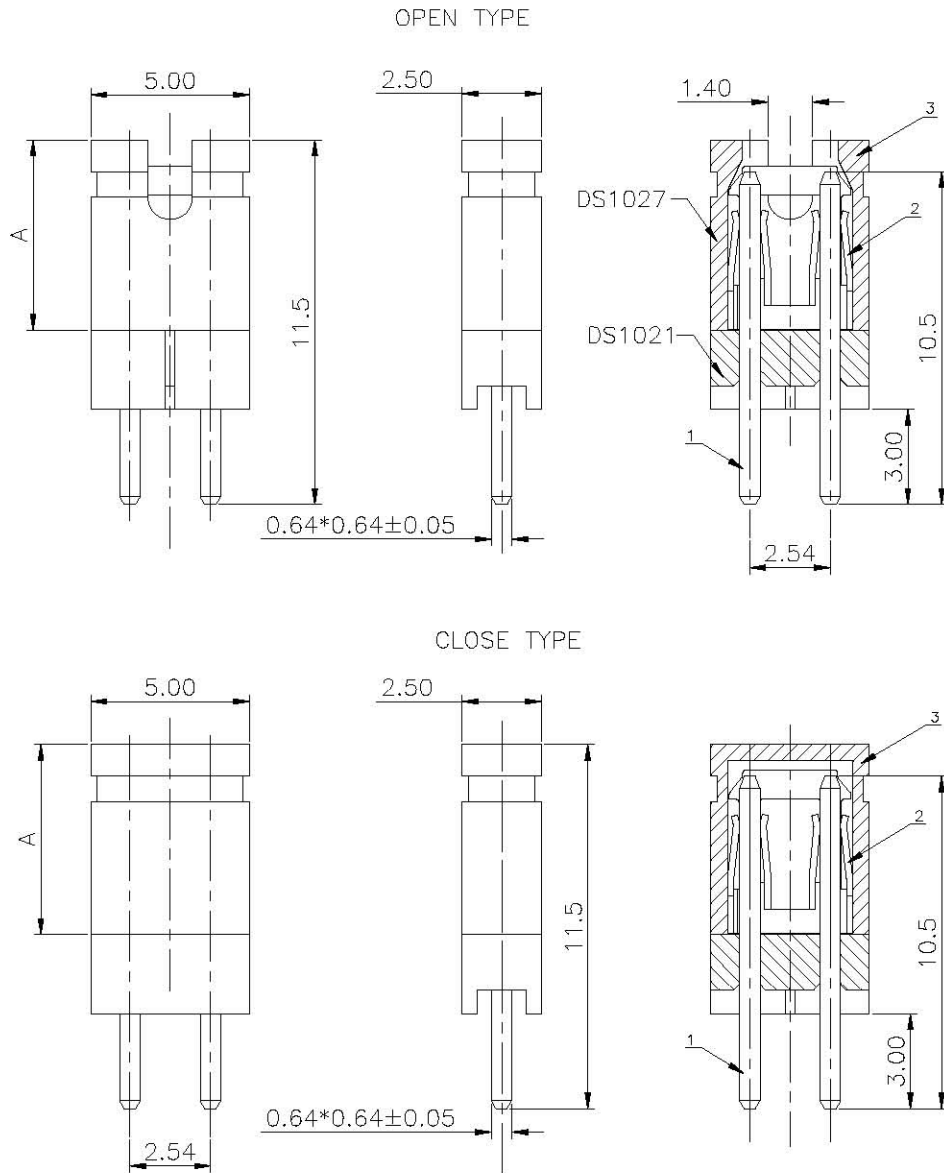

NOTES:

1. SPECIFICATION:

- 1.1 CONTACT RESISTANCE: 30mΩ MAX.
- 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 250V AC(rms) FOR 1 MINUTE.
- 1.3 INSULATION RESISTANCE: 500MΩ Min.
- 1.4 OPERATING TEMPERATURE: -20°C~+80°C.

2. PRODUCT NUMBER CODE:

DS1027-01-X X X X X X

CONNECTOR Q'TY  
1: 2 CONNECTOR  
1PCS DS1021; 1PCS DS1027

PROFILE HEIGHT(DIM A):  
0:6.0mm

CONTACT PLATING:  
8: FULL GOLD FLASH

HOUSING COLOR:  
B: BLACK

HOUSING TYPE:  
A:OPEN B:CLOSE

No.OF CONTACTS:  
2: 2pin

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	UNIT	TITLE
	mm	2.54 MINI JUMPER WITH PIN HEADER
SHEET SIZE	A4	SERIES DS1027-01 SERIES

ITEM	PART NAME	PART NO.	MATERILAS	FINISHED	DRAWING TYPE	CUSTOMER	SCALE	SHEET	1 OF 1
3	DS1027 Housing		PBT	UL 94 V-0					
2	DS1027 Contact		PBT	Gold Flash plated					
1	SQ 0.64		Copper alloy	Gold Flash plated					
					DRAWING NO.	C-DS1027-01-XXXXXX			