




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 06/30/06'		




Dual ROWS




Single ROW

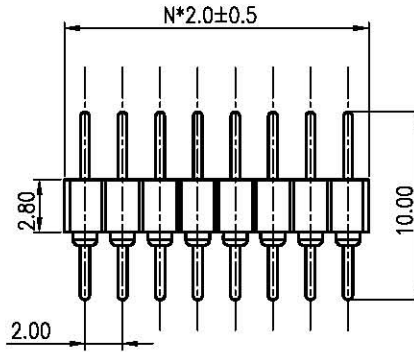


V/T TYPE




Dual ROWS




Single ROW

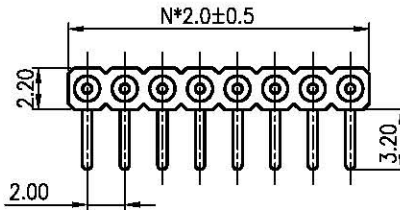


R/A TYPE




Dual ROWS

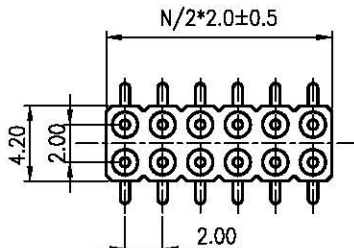

Single ROW



Dual ROWS



Single ROW

SMT TYPE

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE: 0°C~+85°C.
 - STORAGE TEMPERATURE: -20°C~+70°C.
- PRODUCT NUMBER CODE:

DS1004-01 - X X X X

- Housing color
- B: Black
- Contact plating
- 1: Tin 150u"
- 2: Tin 200u"
- 3: G/F
- 4: Gold 3u"
- 5: Gold 10u"
- 6: Gold 15u"
- Mounting type:
- V: V/T TYPE
- R: R/A TYPE
- S: SMT TYPE

No.OF CONTACTS
1*1 - 1*40
2*1 - 2*40

SERIES No.
DS1004-01

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5'
.X	±0.38	.X	±3'
.XX	±0.25	.XX	±2'

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	10F1
DRAWING NO.	C-DS1004-01-XXXX		

PROJECTION		TITLE	DIP & SMT STRIPS ADAPTOR PITCH 2.00mm
UNITS	mm	SHEET SIZE	A4
SHEET SIZE	A4	SERIES	DS1004-01 SERIES

广东中南电子电器有限公司
www.zn-cn.com