

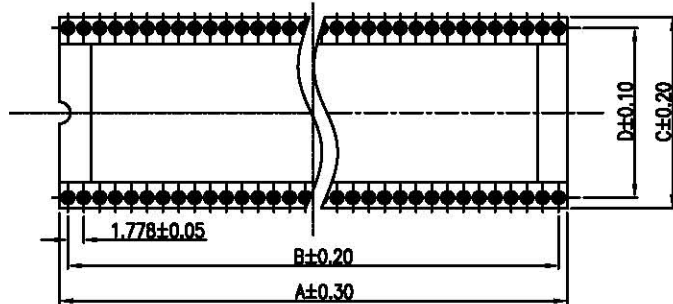



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/24/05'		

Dual rows

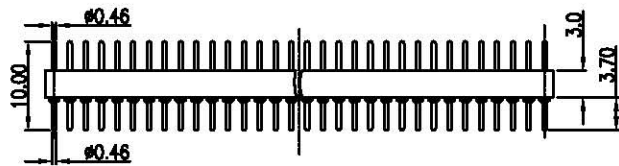

Single row

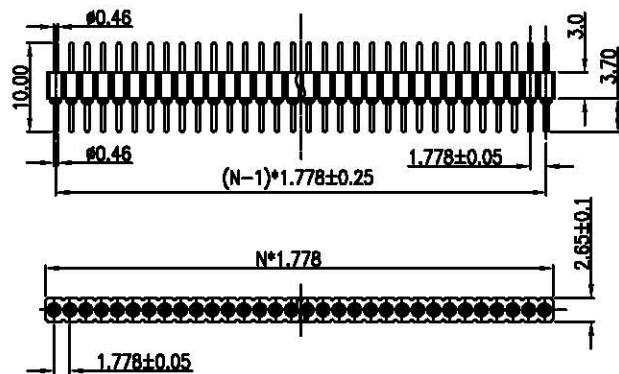

Position	Dimension			
	A	B	C	D
24	21.46	19.56	12.65	10.16
28	25.01	23.11	12.65	10.16
42	37.46	35.56	17.73	15.24
48	42.79	40.89	17.73	15.24
52	46.35	44.45	17.73	15.24
56	49.91	48.01	17.73	15.24
64	57.04	55.12	21.54	19.05

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE: 0°C~+85°C.
 - STORAGE TEMPERATURE: -20°C~+70°C.

3. PART NUMBER: DS1003-03

4. PRODUCT NUMBER CODE:

DS1003-03 - X X X X

- PIN LENGTH
1: 10.00mm
- PIN PLATING
1: Tin 150u"
2: Tin 200u"
3: G/F
4: Gold 3u"
5: Gold 10u"
6: Gold 15u"
- ROW & WIDTH
S: SINGLE ROW 1*1-1*40
1: 10.16mm
2: 15.24mm
3: 19.05mm
- No. OF CONTACTS
24 28 42 48 52 56 64
1*1 to 1*40
2*1 to 2*40
- SERIES No.
DS1003-03

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5'
.X	±0.38	.X	±3'
.XX	±0.25	.XX	±2'

PROJECTION	TITLE
UNITS	MACHINE PIN MEADER IC DIP PITCH 1.778mm
SHEET SIZE	SERIES DS1003-03 SERIES

ITEM	PART NAME	PART NO.	MATERILAS	FINISHED	DRAWING NO.	CUSTOMER
2	CONTACT		COPPER ALLOY	GOLD PLATED	DRAWING TYPE	CUSTOMER
1	HOUSING		THERMOPLASTIC	UL 94 V-0	SCALE	1:1 SHEET 1 OF 1
					DRAWING NO.	C-DS1003-03-XXXX



广东中南电子电器有限公司
http://www.zn-cn.com