





REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/27/05'	~	LJC 04/27/05'
B	整理图画	YCH 11/26/07'	~	

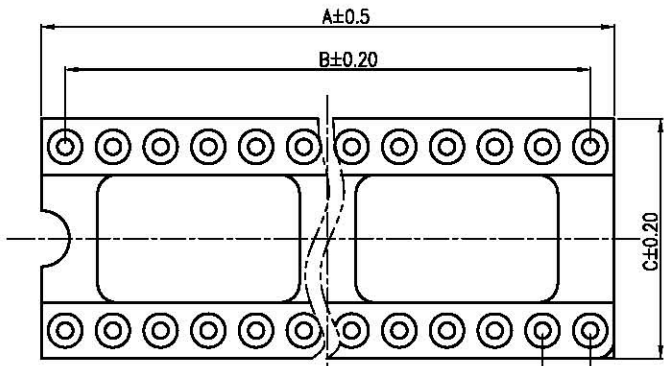

TYPE 1



TYPE 2



TYPE 3

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE: 0°C~+85°C.
 - STORAGE TEMPERATURE: -20°C~+70°C.
- PART NUMBER: DS1003-01
- PRODUCT NUMBER CODE:

DS1003-01 - X X X X X

— CENTRAL SUPPORT
S: W/ CENTRAL SUPPORT
X: W/O CENTRAL SUPPORT

— CONTACT TYPE
1: TYPE 1
2: TYPE 2
3: TYPE 3

— PIN PLATING
F1: Full gold flash


— WIDTH(DIM D)
N:7.62mm
W:15.24mm

— No.OF CONTACTS
06 08 14 16 18
20 24 28 32 40


— SERIES No.
DS1003-01

Dimension


Position	A	B	C	D
06	7.62	5.08	10.16	7.62
08	10.16	7.62	10.16	7.62
14	17.78	15.24	10.16	7.62
16	20.32	17.78	10.16	7.62
18	22.86	20.32	10.16	7.62
20	25.40	22.86	10.16	7.62
24	30.48	27.94	10.16	7.62
28	35.56	33.02	10.16	7.62
24	30.48	27.94	17.78	15.24
28	35.56	33.02	17.78	15.24
32	40.64	38.10	17.78	15.24
40	50.80	48.26	17.78	15.24



TYPE 1



TYPE 2

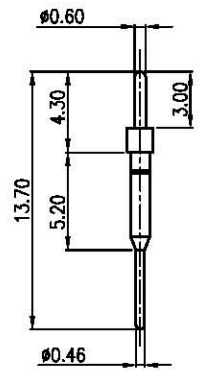

TYPE 3

TYPE1/2/3 DIA.(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5'
.X	±0.38	.X	±3'
.XX	±0.25	.XX	±2'

DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	10F1
DRAWING NO.	C-DS1003-01-XXXXX-B		

PROJECTION	TITLE
UNITS	MACHINE PIN HEADER IC PITCH 2.54mm
SHEET SIZE	SERIES DS1003-01 SERIES

广东中南电子电器有限公司

www.zn-cn.com