

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/24/05'		

NOTES:



- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE: 0°C~+85°C.
 - STORAGE TEMPERATURE: -20°C~+70°C.

3. PART NUMBER: DS1001-03

4. PRODUCT NUMBER CODE:

DS1001-03 - X X X X

- Clip plating
- 1: Tin 150u"
- 2: Tin 200u"
- 3: G/F
- 4: Gold 3u"
- 5: Gold 10u"
- 6: Gold 15u"
- Pin plating
- 1: Tin 150u"
- 2: Tin 200u"
- 3: G/F
- 4: Gold 3u"
- 5: Gold 10u"
- 6: Gold 15u"
- Width
- N: 10.16mm
- W: 15.24mm
- D: 19.05mm
- No. of contacts
- 24 28 42 48 52 56 64
- Series No.
- DS1001-03

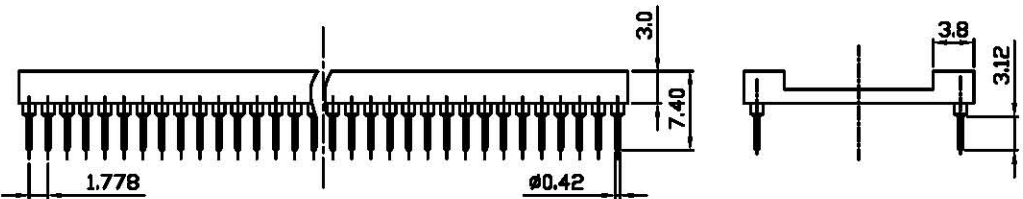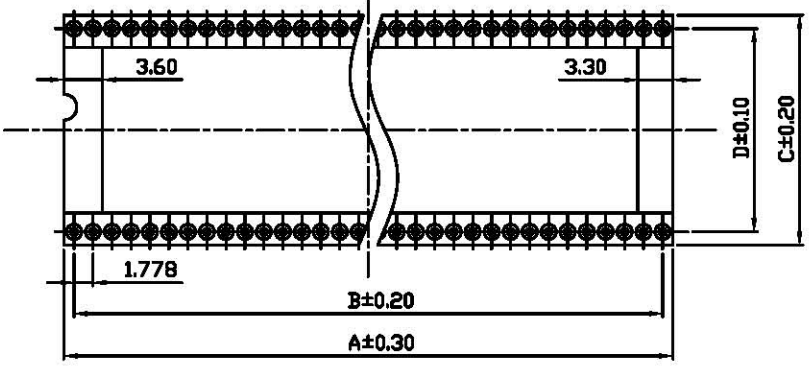

Position	Dimension			
	A	B	C	D
24	21.46	19.56	12.65	10.16
28	25.01	23.11	12.65	10.16
42	37.46	35.56	17.73	15.24
48	42.79	40.89	17.73	15.24
52	46.35	44.45	17.73	15.24
56	49.91	48.01	17.73	15.24
64	57.04	55.12	21.54	19.05

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE
UNITS	DIP IC SOCKET PITCH 1.778mm
SHEET SIZE	SERIES DS1001-03 SERIES

2	CONTACT	COPPER ALLOY	GOLD PLATED	DRAWING TYPE	CUSTOMER
1	HOUSING	THERMOPLASTIC	UL 94 V-0	SCALE	1:1 SHEET 1 OF 1
ITEM	PART NAME	PART NO.	MATERILAS	FINISHED	DRAWING NO. C-DS1001-03-XXXX

广东中南电子电器有限公司
www.zn-cn.com