

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 03/30/06'	~	LJC 09/20/05'
B	整理图面	YCH 07/27/07'	~	

NOTES:

- MATERIAL
  - INSULATOR: THERMOPLASTIC (UL 94V-0).
  - CONTACT: COPPER ALLOY.
  - CONTACT PLATED: SEE ORDERING INFORMATION.
- SPECIFICATION
  - STORAGE TEMPERATURE: -20-70°C.
  - OPERATING TEMPERATURE: 0-85°C.
  - CONTACT RESISTANCE: 20mΩ max.
  - INSULATION RESISTANCE: 1000MΩ min.
  - DIELECTRIC WITHSTANDING VOLTAGE: AC 500V PER MINUTE.
- PART NUMBER: DS1010
- PRODUCT NUMBER CODE:
 

DS1010 -	X	X	X	X	
	└─┘	└─┘	└─┘	└─┘	Central support
		└─┘	└─┘	└─┘	S: W/ central support
			└─┘	└─┘	X: W/O central support
				└─┘	Width dim.D
					N: 10.16mm
					W: 15.24mm
					D: 19.05mm
				└─┘	Contact plating
					T1: Tin
					No. OF CONTACTS
					24 28 30 32 40
					42 48 52 54 64
					Series No.
					DS1010

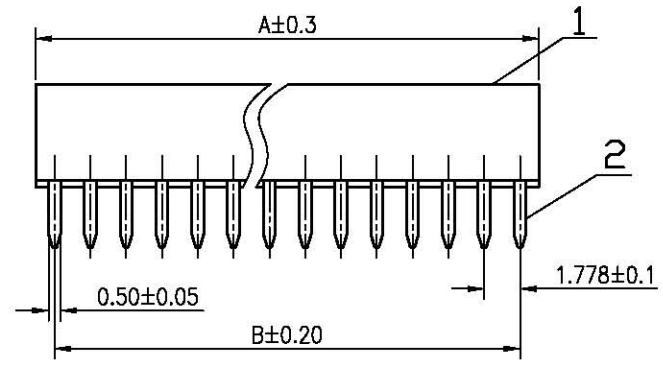
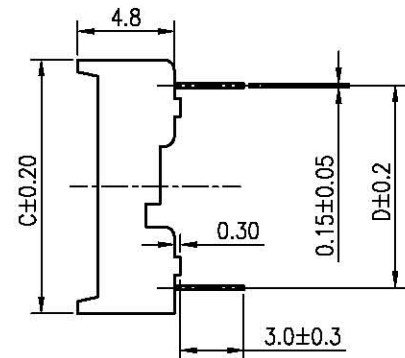
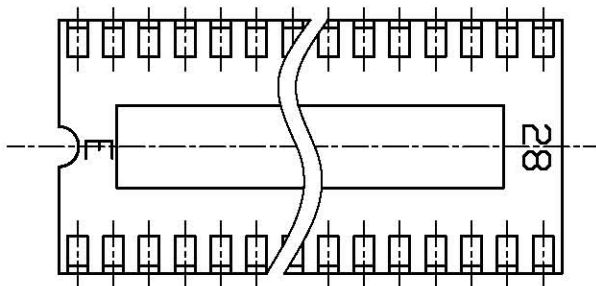


Table A:

Position	Dimension			
	A	B	C	D
24	21.34	19.56	12.65	10.16
28	24.89	23.11	12.65	10.16
30	26.67	24.89	12.65	10.16
32	27.45	26.67	12.65	10.16
40	35.56	33.78	17.73	15.24
42	37.34	35.56	17.73	15.24
48	42.67	40.89	17.73	15.24
52	46.23	44.45	17.73	15.24
56	49.78	48.01	17.73	15.24
64	56.90	55.12	21.54	19.05

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5'
.X	±0.38	.X	±3'
.XX	±0.25	.XX	±2'

PROJECTION	TITLE
UNITS	IC SOCKET PITCH 1.778mm(0.070)
SHEET SIZE	SERIES DS1010 SERIES

ITEM	PART NAME	PART NO.	MATERIALS	FINISHED	DRAWING NO.	CUSTOMER
2	CONTACT		COPPER ALLOY	GOLD PLATED		
1	HOUSING		THERMOPLASTIC	UL 94 V-0	SCALE	1:1 SHEET 1 OF 1
					DRAWING NO.	C-DS1010-XXXX

广东中南电子电器有限公司

www.zn-cn.com