

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 04/10/08'	~	LJC 04/10/08'
B	更新图面	YCH 11/17/08'	~	

NOTES:



1.SPECIFICATION

- Temperature range:-45~110°C
- Contact Resistance:20mΩ max.
- Insulation Resistance:1,000MΩ min
- Dielectric Withstanding Voltage:
AC 500V Per Minute


2.PRODUCT NUMBER CODE:

DS1011-03 - X X X X


- Housing Color
B: Black
L: Blue
- Contact Plating
B: All Gold Flash
- Mounting Type
R: R/A
V: V/T
- No.of Contacts
10 14 16 20
26 30 34 40
50 60 64
- Series No
DS1011-03

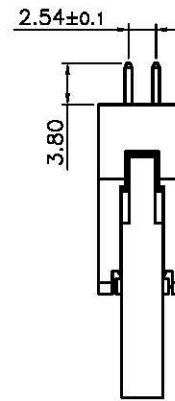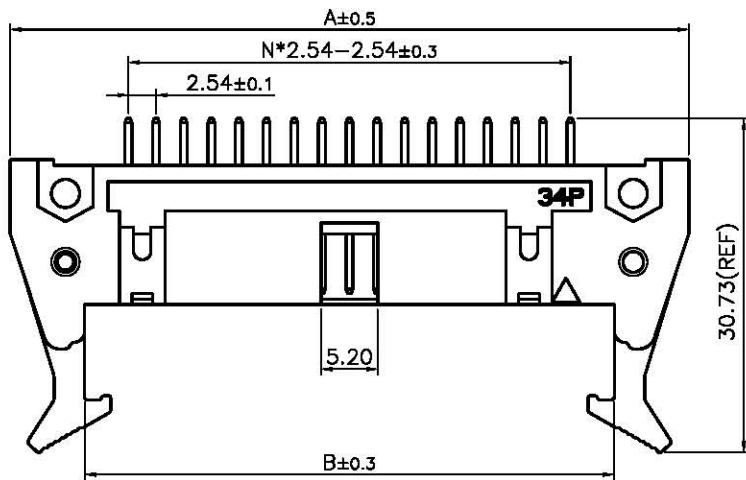

V/T TYPE

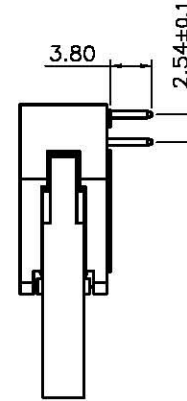

R/A TYPE

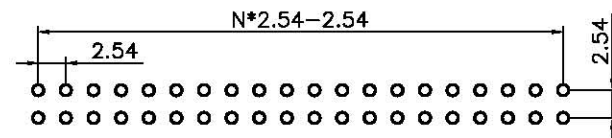

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

No.of Contacts	10	14	16	20	26	30	34	40	50	60	64
A	31.92	37.00	39.54	44.62	52.24	57.32	62.40	70.02	82.72	95.42	100.50
B	18.22	23.30	25.84	30.92	38.54	43.62	48.70	56.32	69.02	81.72	86.80

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		SHROUDED HEADER PITCH 2.54mm
.X	±0.38	.X	±3°	mm	
.XX	±0.25	.XX	±2°	SHEET SIZE	A4
DRAWING TYPE				SERIES	
SCALE				DS1011-03	
DRAWING NO.				C-DS1011-03-XXXX-B	

广东中南电子电器有限公司

www.zn-cn.com