




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 04/10/08'	~	

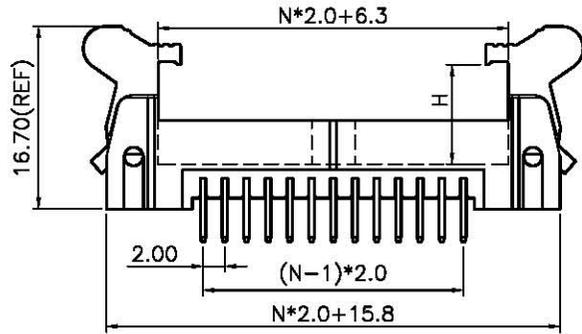

V/T TYPE

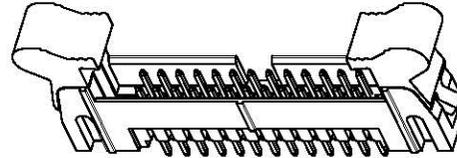

NOTES:

1.MATERIALS

- . Contact: copper alloy
- . Insulation: PA-46


2.SPECIFICATION

- . Storage Temperature:-20~70°C
- . Operating Temperature:0~85°C
- . Contact Resistance:20mΩ max.(initial)
- . Insulation Resistance:1,000MΩ min
- . Dielectric Withstanding Voltage:AC 500V Per Minute


3.PRODUCT NUMBER CODE:

DS1011-02 - X X X X X



- Housing Color
B: Black
A: Gray
- Contact Plating
B: All Gold Flash
- Ejector Type(Dim. H)
L: Long(11.80mm)
N: W/O(9.10mm)
- Mounting Type
R: R/A
S: SMT
V: V/T
- No.of Contacts
10 26 34
40 44 50
60
- Series No
DS1011-02




DIP P.C.Board Layout
(TOLERANCE=±0.05)




R/A TYPE

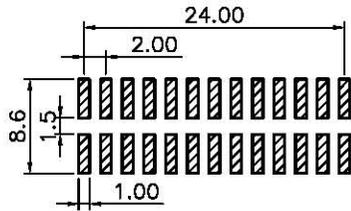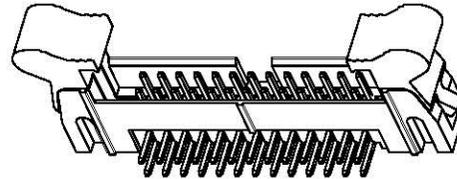

SMT P.C.Board Layout
(TOLERANCE=±0.05)



SMT TYPE

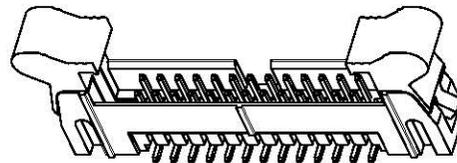

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE
UNITS	SHROUDED HEADER PITCH 2.0mm
SHEET SIZE	SERIES DS1011-02

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1011-02-XXXXX-A		

广东中南电子电器有限公司

www.zn-cn.com